


SOLENOID VALVES 3-WAY

BATTLEFIELD INTERNATIONAL PNEUMATIC VALVES



Series V0X32E are 3 way 2 position solenoid valves used to control air pilot valves, or to directly control cylinders and other pneumatic devices. Each Battlefield solenoid valve comes complete with the required solenoid coils and the coil plugs. This series offers exceptional flow characteristics and the 1/8 and 1/4 ported valves can be manifold mounted. Our V0X32E valves are made from machined and anodized aluminum. Temperature range is -20C....+80C. Supply pressure range is 3....10 bar

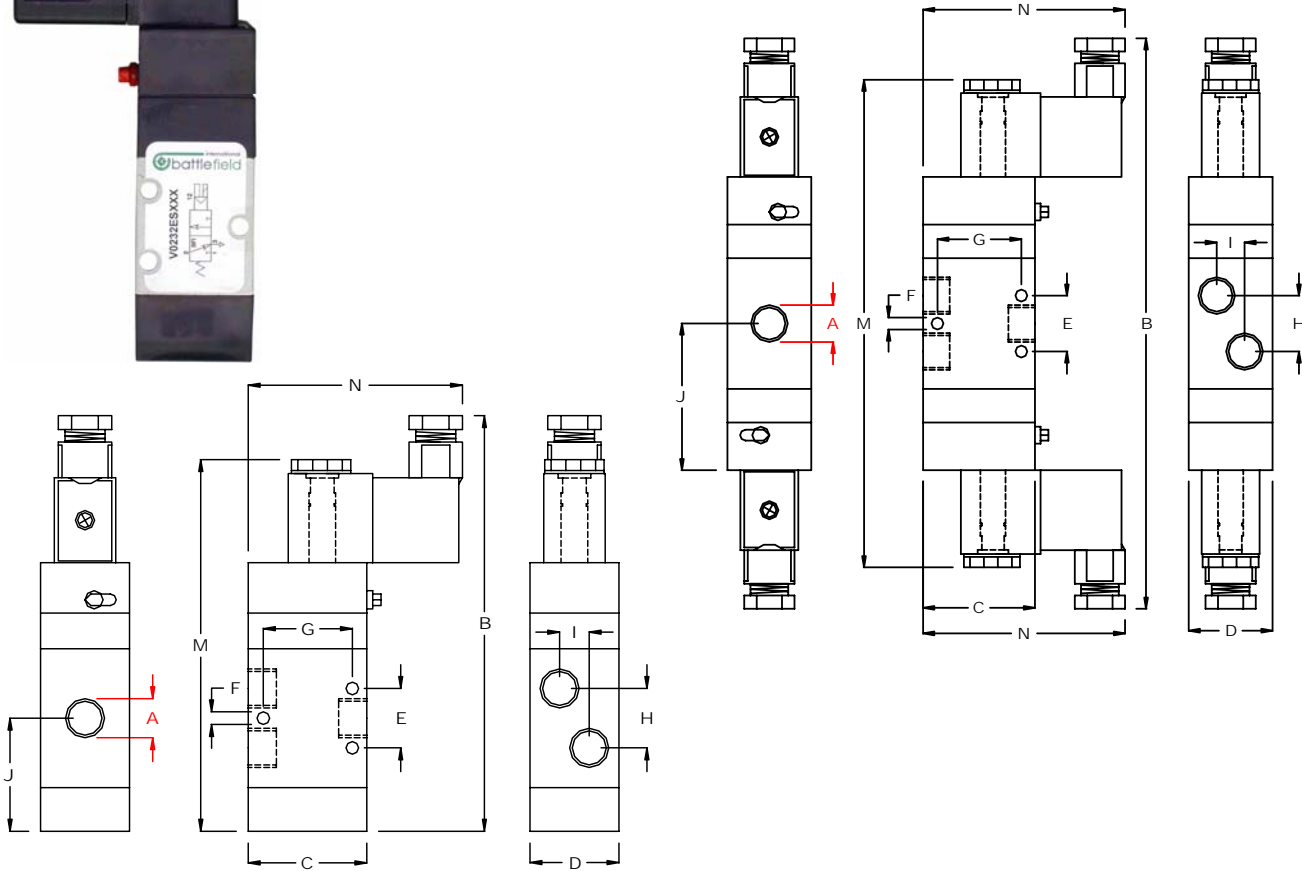

Part Number	Description	Schematic	A	B	Flow	C	D	E	F	G	H	I	J	M	N	O
V0232ESXXX -Voltage	1/8"3way 2position, solenoid operated, spring return, N-C		1/8	133	650 l/m	30	26	18	4.25	23	1 8	0	34.5	119	63	85
V0432ESXXX -Voltage	1/4"3way 2position, solenoid operated, spring return, N-C		1/4	140	1080 l/m	40	30	20	4.25	30	2 0	10	38	125	73	-
V0832ESXXX -Voltage	1/2"3way 2position, solenoid operated, spring return, N-C		1/2	172	3500 l/m	60	40	40	5.5	50	4	0	52	158	60	122
V0232ESOXX -Voltage	1/8"3way 2position, solenoid operated, spring return, N-O		1/8	133	650 l/m	30	26	18	4.25	23	1 8	0	34.5	119	63	85
V0432ESOXX -Voltage	1/4"3way 2position, solenoid operated, spring return, N-O		1/4	140	1080 l/m	40	30	20	4.25	30	2 0	10	38	125	73	-
V0832ESOXX -Voltage	1/2"3way 2position, solenoid operated, spring return, N-O		1/2	172	3500 l/m	60	40	40	5.5	50	4	0	52	158	60	122
V0232EEXXX -Voltage	1/8"3way 2position, double solenoid operated		1/8	197	650 l/m	30	26	18	4.25	23	1 8	0	50.5	169	63	101
V0432EEXXX -Voltage	1/4"3way 2position, double solenoid operated		1/4	203	1080 l/m	40	30	20	4.25	30	2 0	10	53	175	73	-
V0832EEXXX -Voltage	1/2"3way 2position, double pilot operated		1/2	240	3500 l/m	60	40	40	5.5	50	4	0	70	212	60	140